

## Anti-Ligature Shower Panel

### FEATURES:

- Includes CPT-SAL3200 anti-ligature shower valve trim & CPV-PB pressure balance valve
- Use with ligature-resistant shower head (sold separately)
  - S-2460 - 2.5 gpm (9.5 L/min) flow rate
  - S-2460-E2 - 2.0 gpm (7.6 L/min) flow rate
  - S-2460-E175 - 1.75 gpm (6.6 L/min) flow rate
- Stainless steel construction
- Includes tamper resistant stainless steel screws

### STOCK FINISH:



PC



### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- NSF/ANSI/CAN 372
- IAPMO IGC 154
- ADA compliant

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- See [Speakman.com](http://Speakman.com) For Warranty Information

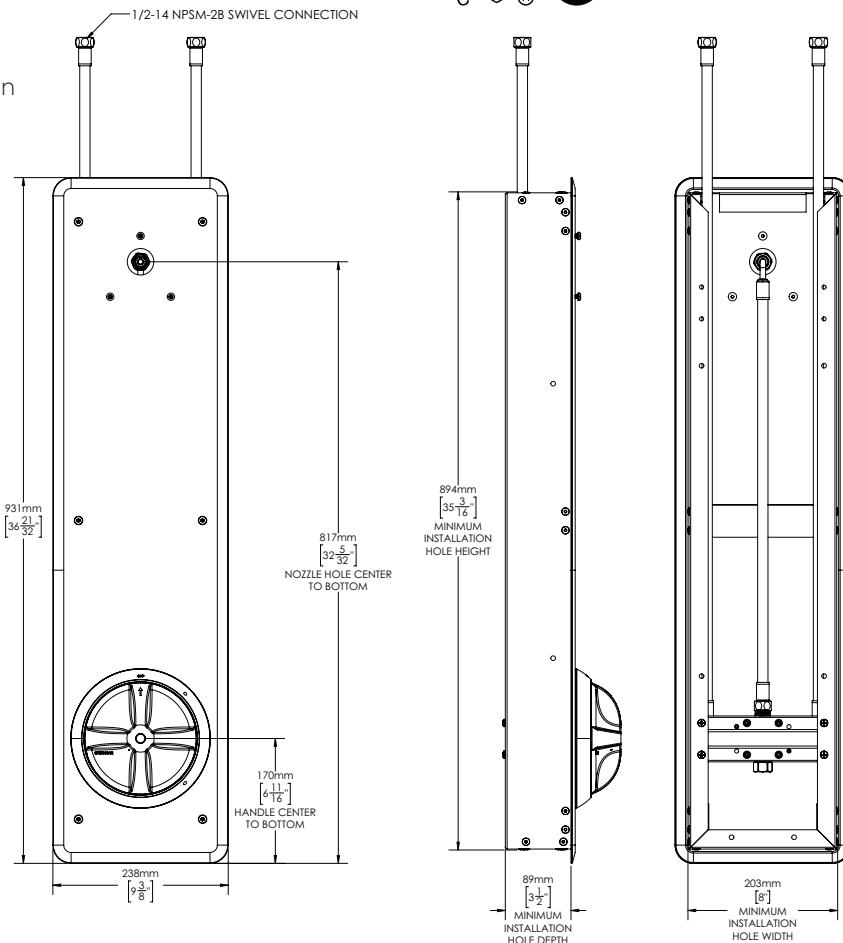

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107  
 F: 800-977-2747  
 W: [WWW.SPEAKMAN.COM](http://WWW.SPEAKMAN.COM)  
 R: 01-SEPTEMBER 2024