

Exposed Anti-Scald Balanced Pressure Shower

FEATURES:

- Sentinel Mark II® exposed anti-scald balanced pressure Showerpac.
- 18 gauge stainless steel outer shielding.
- Stainless steel self-draining soap dish.
- Chrome plated brass lever handle.
- Adjustable temperature limit stop.
- Brass valve body. Integral spring check stops.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Concealed integral mounting lugs.
- S-2292 showerhead with flow control device reduces flow to 2.5 gpm (9.46 L/min) maximum
- ½ in. copper tube inlets through the wall or dropped from ceiling.
- Vandal-resistant construction.

OPTIONS:

- -LH: Less showerhead
- -1: S-2251 shower head
- -2: S-2252 shower head
- -5: S-2272-E2 shower head
- -LSD: Less soap dish



STANDARDS:

- ASSE 1016 certified (valve)
- ASME A112.18.1/CSA B125.1 certified (valve & shower head)
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

- 5 Year Limited Warranty (commercial)
- 5 Year Limited Warranty (residential)

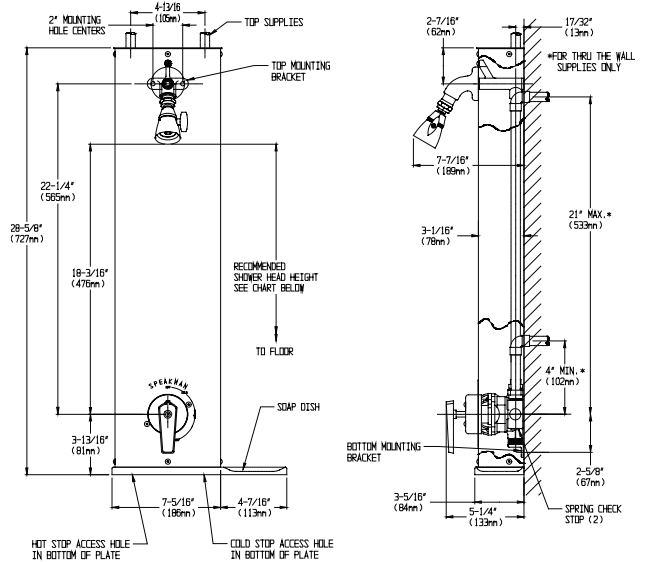

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 01-APRIL 2022