

## Commercial Brass Showerhead

### FEATURES:

- Vandal-resistant standard.
- 1/2 in. NPTF inlet.
- 3 1/2 in. square brass shank
- Spray adjusting T-handle
- 2.5 gpm (9.45 L/min) flow rate
- 4 Plungers, 32 sprays
- Ball joint

### FINISH:



PC


### STANDARDS:

- ASME A112.18.1/CSA B125.1 compliant

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- 5 year limited

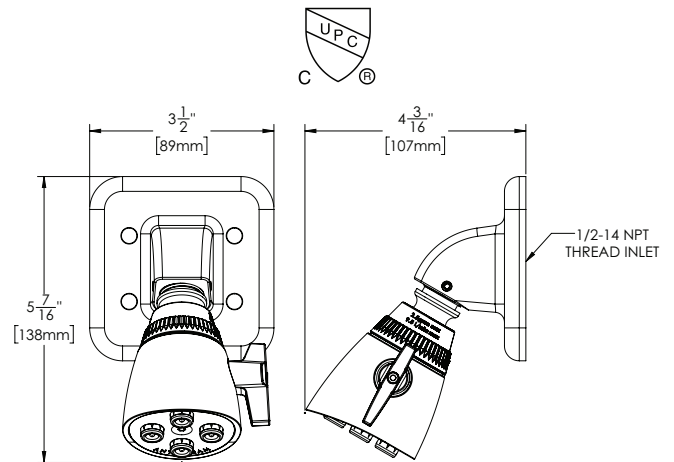

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107  
F: 800-977-2747  
W: [WWW.SPEAKMAN.COM](http://WWW.SPEAKMAN.COM)  
R: 02-APRIL 2024