# SPEAKMAN® SE-693

# Combination Shower with Round Eyewash System

# EYE WASH FEATURES: (SE-582)

- (2) aerated yellow plastic spray outlets
- 300 series stainless steel bowl
- $\frac{1}{2}$  in. NPT female brass, chrome-plated valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 3.18 gpm @ 30 psi
- Universal emergency sign included

# SHOWER FEATURES:

- 8 in. yellow plastic showerhead
- Internal 20 gpm restrictor flow control
- 1 in. NPT female brass, chrome plated, full flow stay-open ball valve
- Powder coated yellow aluminum triangular pull rod activator
- $\bullet$  1¼ in. galvanized steel piping stanchion and fittings
- 11/4 in. NPT female inlet & waste
- DuraJade<sup>™</sup> powder-coated finish on stanchion for durability and enhanced corrosion resistance.
- 20 gpm @ 30 psi

### **FINISHES:**

DuraJade™ powder-coated galvanized steel (standard)

# COMPLIANCE:

• Certified to ANSI/ISEA Z358.1

### **OPTIONS**:

#### Add suffix to model #

<ul> <li>Anti-freeze protection valve</li> </ul>	-FPV
<ul> <li>Hand &amp; foot operation</li> </ul>	🛛 -HFO

🛛 -HS

-SCSV

-SPR

-SPV

-SSBV1

-SSBV2

🛛 -SSH

- Hand-held spray
- Self-closing shower valve with chain & ring
- Stainless steel pull rod
- Anti-scald protection valve
- 1 in. IPS stainless steel ball valve
- $\bullet$   $\ensuremath{\ensuremath{^{\prime\prime}_{2}}}$  in. IPS stainless steel ball valve
- Stainless steel showerhead

#### WARRANTY:


• 3 year limited



Architect/Engineer Approval Space:

# **SPEAKMAN®**

# DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

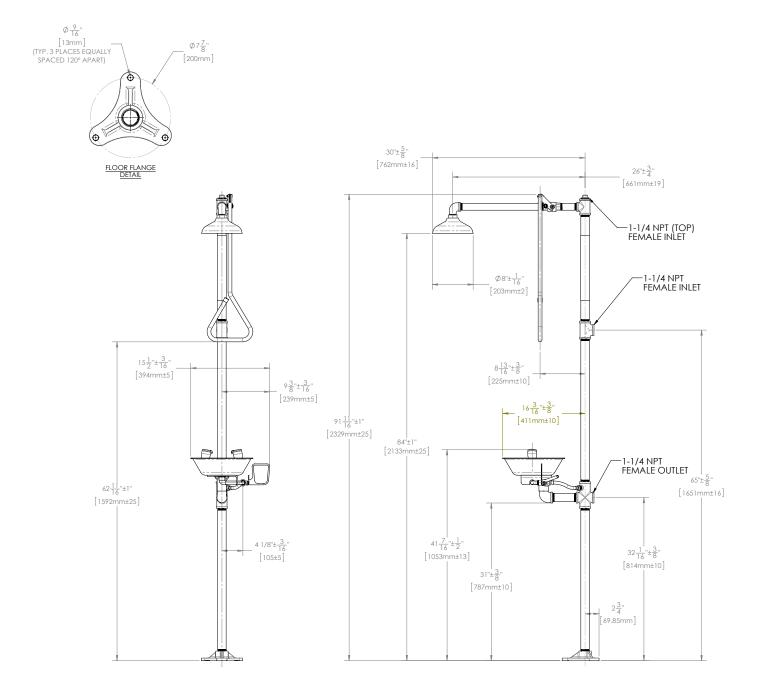

Architect/Engineer Approval Space:

P: 800-537-2107 F: 800-977-2747 W: WWW.SPEAKMAN.COM R: MARCH 2017