Heat Traced Combination Shower with Eye/Face Wash System

EYEWASH FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, bottom supply inlet
- 20 gpm @ 30 psi

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch.
 Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 220 vac, 50 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B. C. D.
- Ground Fault Protection: Installation will require minimum 30 mA GFPD

OPTIONS:

Add suffix to model # Integral:

• Drench hose option

- ☐ -DH☐ -IT
- Immersion well thermometer
- ☐-SPV

Scald protection valve1 in, union

□ -UN1

STANDARDS:

• ANSI/ISEA Z358.1 certified

WARRANTY:

Visit www.speakman.com for full product warranty information


• 3 Year Limited Warranty (commercial)



Information continues on next page

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Heat Traced Combination Shower with Eye/Face Wash System

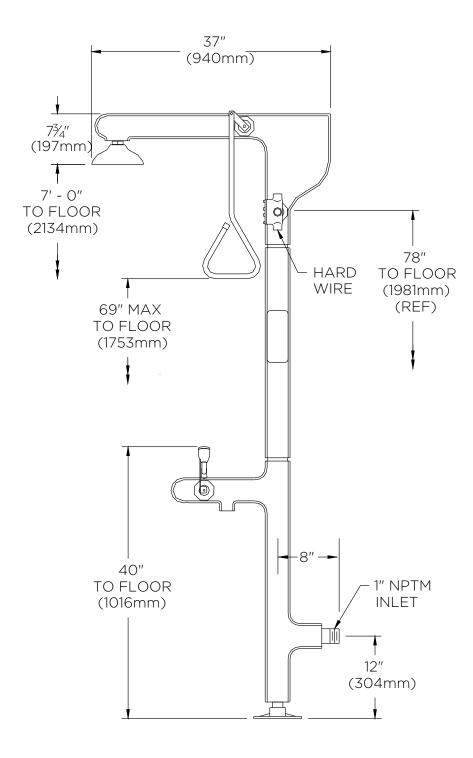

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.