

Neo® Trim, Shower and Tub Package (Valve not included)

MODELS:

- SLV-1050: 2.5 GPM (9.5 L/min) Flow Rate Hand Shower
- SLV-1050-E2: 2.0 GPM (7.6 L/min) Flow Rate Hand Shower
- SLV-1050-E175: 1.75 GPM (6.6 L/min) Flow Rate Hand Shower

FEATURES:

- CPT-1001: Shower Valve Trim
- VS-3010: 2.5 GPM (9.5 L/min) Flow Rate Hand Shower w/ 60 in. Hose
- VS-3010-E2: 2.0 GPM (7.6 L/min) Flow Rate Hand Shower w/ 60 in. Hose used in SLV-1050-E2 Model
- VS-3010-E175: 1.75 GPM (6.6 L/min) Flow Rate Hand Shower w/ 60 in. Hose used in SLV-1050-E175 Model
- VS-155: Supply Ell with Wall Flange
- VS-156: Pause/Trickle Adaptor
- SA-1002: Slide Bar
- S-1558: Diverter Tub Spout

VALVE OPTIONS:

- CPV-PB: Pressure Balance Valve
Sweat & Thread Connections
- CPV-PB-PXC: Pressure Balance Valve
PEX F1807 Crimp Inlet Connections
- CPV-PB-PXE: Pressure Balance Valve
PEX F1960 Cold-Expansion Inlet Connections
- CPV-T2: Thermostatic Valve
Sweat & Thread Connections
- CPV-T2-PXC: Thermostatic Valve
PEX F1807 Crimp Inlet Connections
- CPV-T2-PXE: Thermostatic Valve
PEX F1960 Cold-Expansion Inlet Connections



STOCK FINISHES:



PC BN MB

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA compliant
- WaterSense: VS-3010-E2 and VS-3010-E175 certified to meet WaterSense


WARRANTY:

Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information

Information continues on next page

Neo® Trim, Shower and Tub Package (Valve not included)

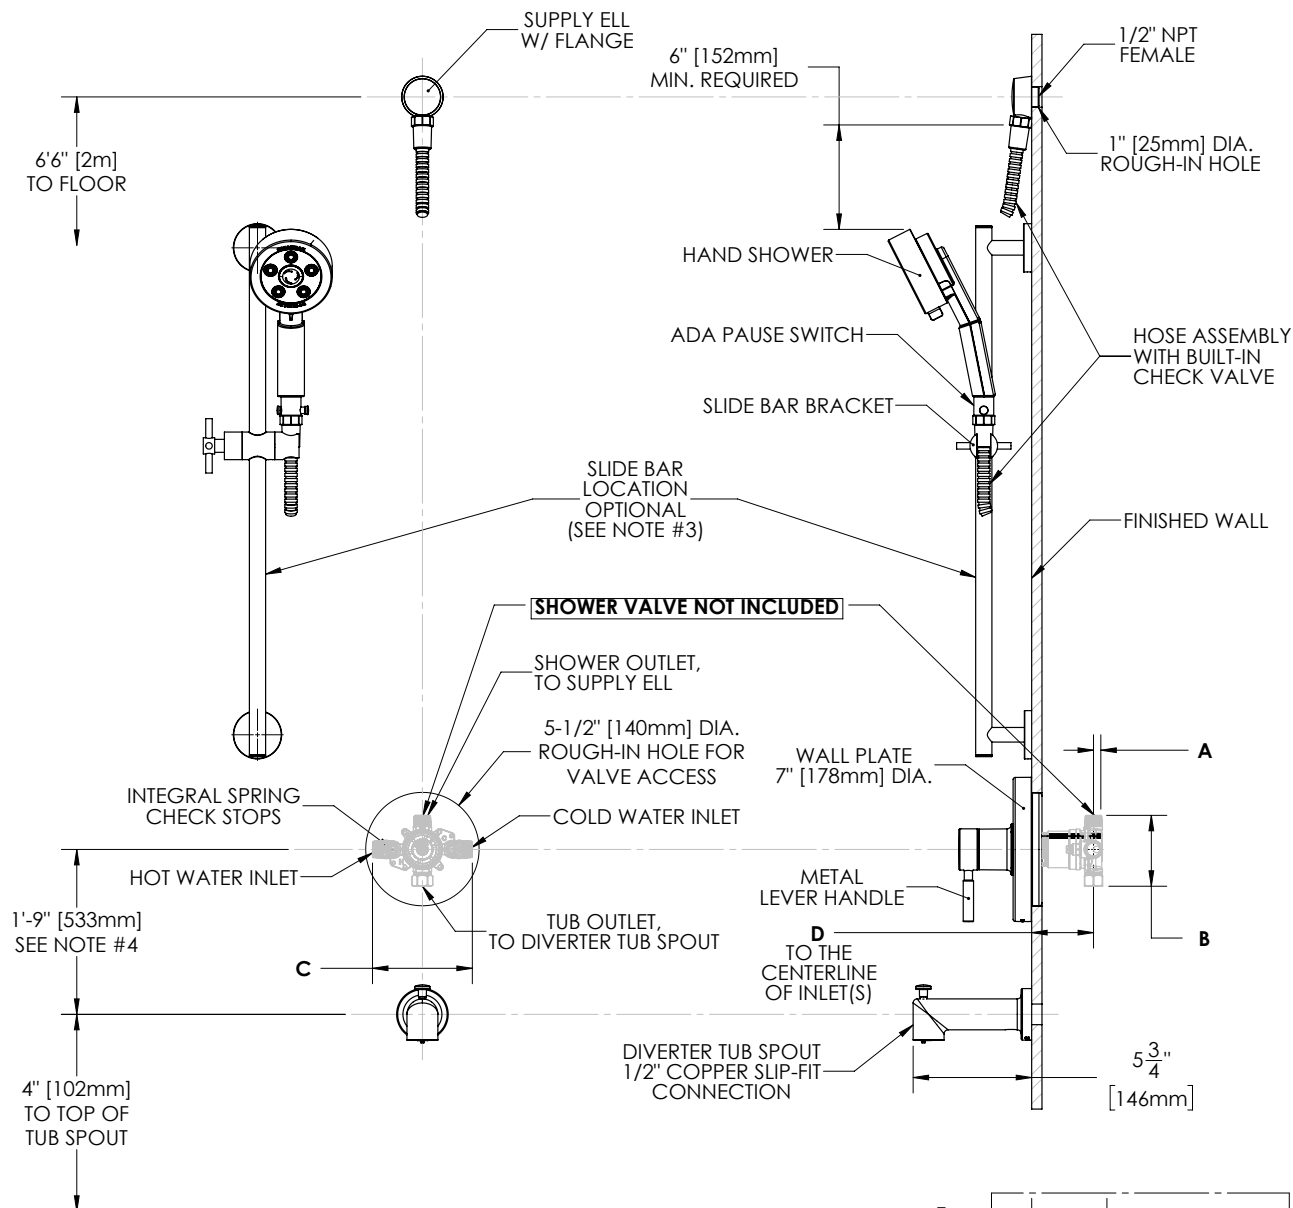

NOTES:

- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
- THE LOCATIONS OF THE SLIDE BAR AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 60" HOSE LENGTH RUNNING FROM THE SUPPLY ELL TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE CHECK VALVE AND TOP OF THE HAND SHOWER (WHEN HAND SHOWER IS ADJUSTED TO HIGHEST POSITION).
- FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.

DIMENSION	CPV-PB	CPV-T2	CPV-PB-PXC	CPV-PB-PXE	CPV-T2-PXC	CPV-T2-PXE
A	7/16" (11mm)	1/2" (12mm)	7/16" (11mm)	7/16" (11mm)	1/2" (12mm)	1/2" (12mm)
B	3-5/16" (84mm)	3-1/2" (89mm)	3-5/16" (84mm)	3-5/16" (84mm)	3-1/2" (89mm)	3-1/2" (89mm)
C	4-13/16" (123mm)	5-7/8" (150mm)	4-13/16" (123mm)	4-13/16" (123mm)	5-7/8" (150mm)	5-7/8" (150mm)
D	2-1/2" (63mm) MIN TO 3-1/2" (89mm) MAX					
E			3-1/8" (79mm) MIN TO 4-1/8" (105mm) MAX	3-1/8" (79mm) MIN TO 4-1/8" (105mm) MAX	3-3/16" (81mm) MIN TO 4-3/16" (106mm) MAX	3-3/16" (81mm) MIN TO 4-3/16" (106mm) MAX