

Neo® Trim, Handicap Shower and Tub System (Valve not included)

MODELS:

- SLV-1090: 2.5 GPM (9.5 L/min) Flow Rate Hand Shower
- SLV-1090-E2: 2.0 GPM (7.6 L/min) Flow Rate Hand Shower
- SLV-1090-E175: 1.75 GPM (6.6 L/min) Flow Rate Hand Shower

FEATURES:

- CPT-1001: Shower Valve Trim
- S-2540: Shower Arm and Flange
- VS-3010: 2.5 GPM (9.5 L/min Flow Rate Hand Shower w/ 60 in. Hose
- VS-3010-E2: 2.0 GPM (7.6 L/min) Flow Rate Hand Shower w/ 60 in. Hose used in SLV-1090-E2 Model
- VS-3010-E175: 1.75 GPM (6.6 L/min) Flow Rate Hand Shower w/ 60 in. Hose used in SLV-1090-E175 Model
- VS-156: Pause/Trickle Adaptor
- VS-153-ADA: 24 in. ADA Slide Bar
- S-1558: Diverter Tub Spout

VALVE OPTIONS:

- CPV-PB: Pressure Balance Valve
Sweat & Thread Connections
- CPV-PB-PXC: Pressure Balance Valve
PEX F1807 Crimp Inlet Connections
- CPV-PB-PXE: Pressure Balance Valve
PEX F1960 Cold-Expansion Inlet Connections
- CPV-T2: Thermostatic Valve
Sweat & Thread Connections
- CPV-T2-PXC: Thermostatic Valve
PEX F1807 Crimp Inlet Connections
- CPV-T2-PXE: Thermostatic Valve
PEX F1960 Cold-Expansion Inlet Connections

STOCK FINISHES:



PC BN MB

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA compliant
- WaterSense: VS-3010-E2 and VS-3010-E175 certified to meet WaterSense

WARRANTY:


Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information




Information continues on next page

Neo® Trim, Handicap Shower and Tub System (Valve not included)

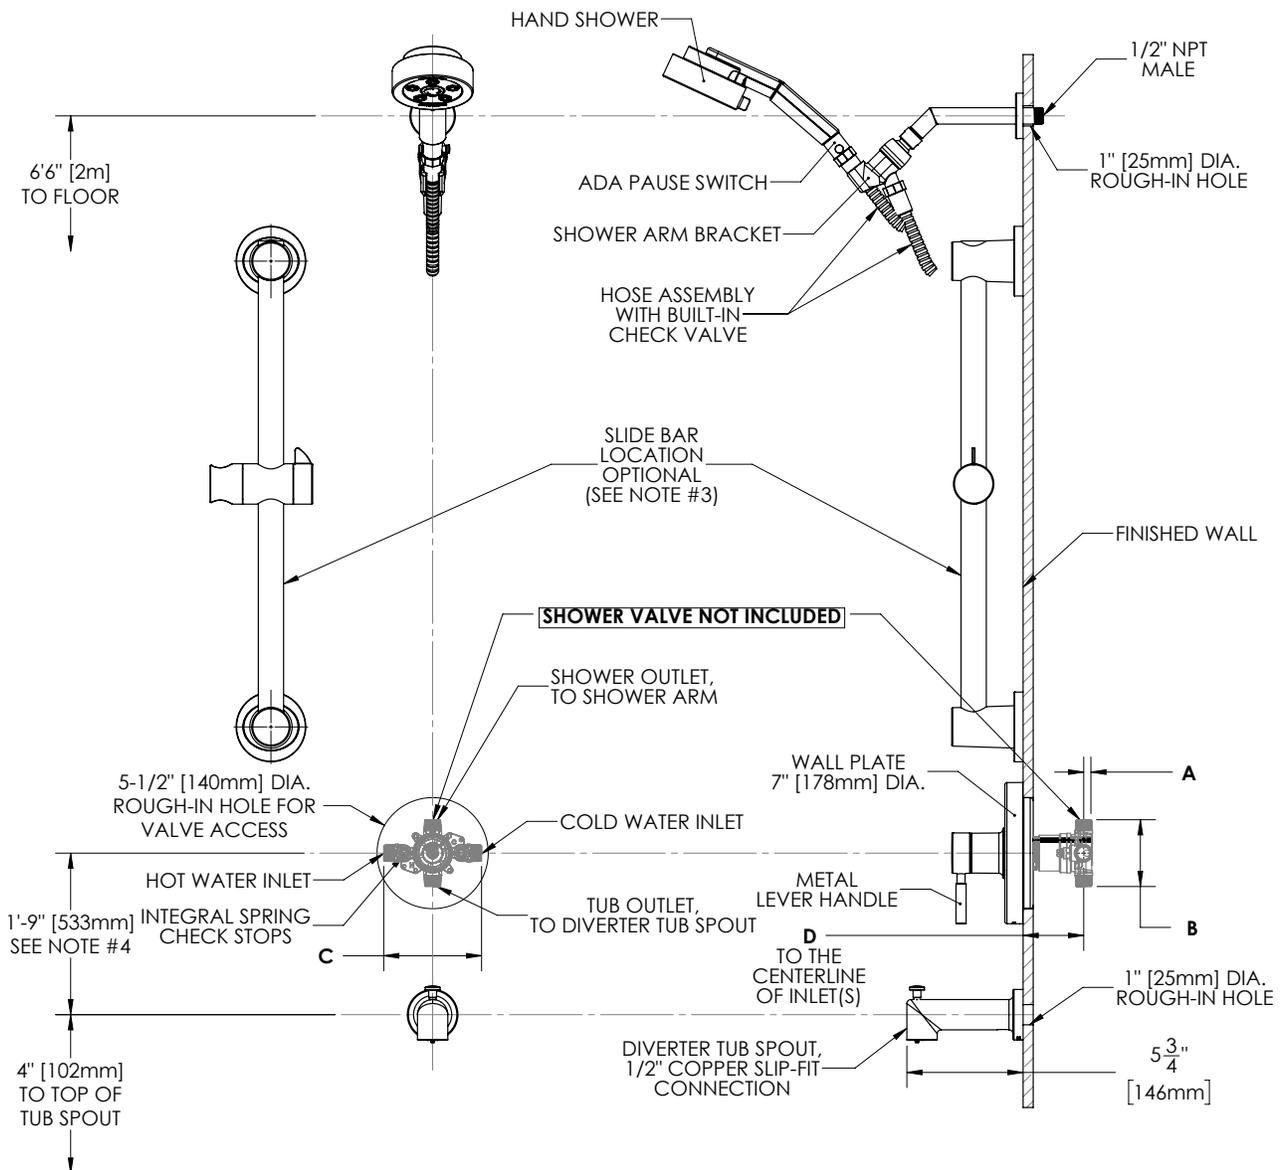

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
2. THE LOCATION OF THE SLIDE BAR IS OPTIONAL, BUT RESTRICTED BY THE 60' HOSE LENGTH RUNNING FROM THE SHOWER ARM BRACKET TO THE HAND SHOWER.
3. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.

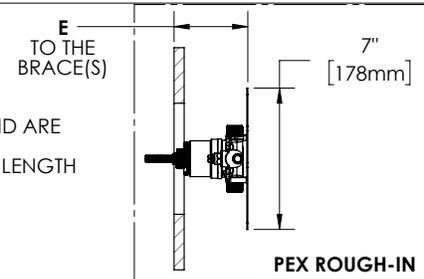

DIMENSION	CPV-PB	CPV-T2	CPV-PB-PXC	CPV-PB-PXE	CPV-T2-PXC	CPV-T2-PXE
A	7/16" [11mm]	1/2" [12mm]	7/16" [11mm]	7/16" [11mm]	1/2" [12mm]	1/2" [12mm]
B	3-5/16" [84mm]	3-1/2" [89mm]	3-5/16" [84mm]	3-5/16" [84mm]	3-1/2" [89mm]	3-1/2" [89mm]
C	4-13/16" [123mm]	5-7/8" [150mm]	4-13/16" [123mm]	4-13/16" [123mm]	5-7/8" [150mm]	5-7/8" [150mm]
D	2-1/2" [63mm] MIN TO 3-1/2" [89mm] MAX					
E			3-1/8" [79mm] MIN TO 4-1/8" [105mm] MAX		3-3/16" [81mm] MIN TO 4-3/16" [106mm] MAX	