

Anti-Ligature Trim and and Shower Combination (Valve not included)

MODELS:

- SLV-3200: 2.5 GPM (9.5 L/min) Flow Rate Shower Head
- SLV-3200-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- SLV-3200-E175: 1.75 GPM (6.6 L/min) Flow Rate Shower Head

FEATURES:

- CPT-SAL3200: Anti-Ligature Shower Valve Trim
- S-2460: 2.5 GPM (9.5 L/min) Flow Rate Shower Head
- S-2460-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head used in SLV-3200-E2 Model.
- S-2460-E175: 1.75 GPM (6.6 L/min) Flow Rate Shower Head used in SLV-3200-E175 Model.

VALVE OPTIONS:

- CPV-PB: Pressure Balance Valve
Sweat & Thread Connections

STOCK FINISHES:



PC



STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information




Information continues on next page

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat and 1/2" male NPT. 3. For ADA mounting locations consult ADAAG, ANSI A117.1 or state regulations.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-SEPTEMBER 2024

Anti-Ligature Trim and Shower Combination (Valve not included)

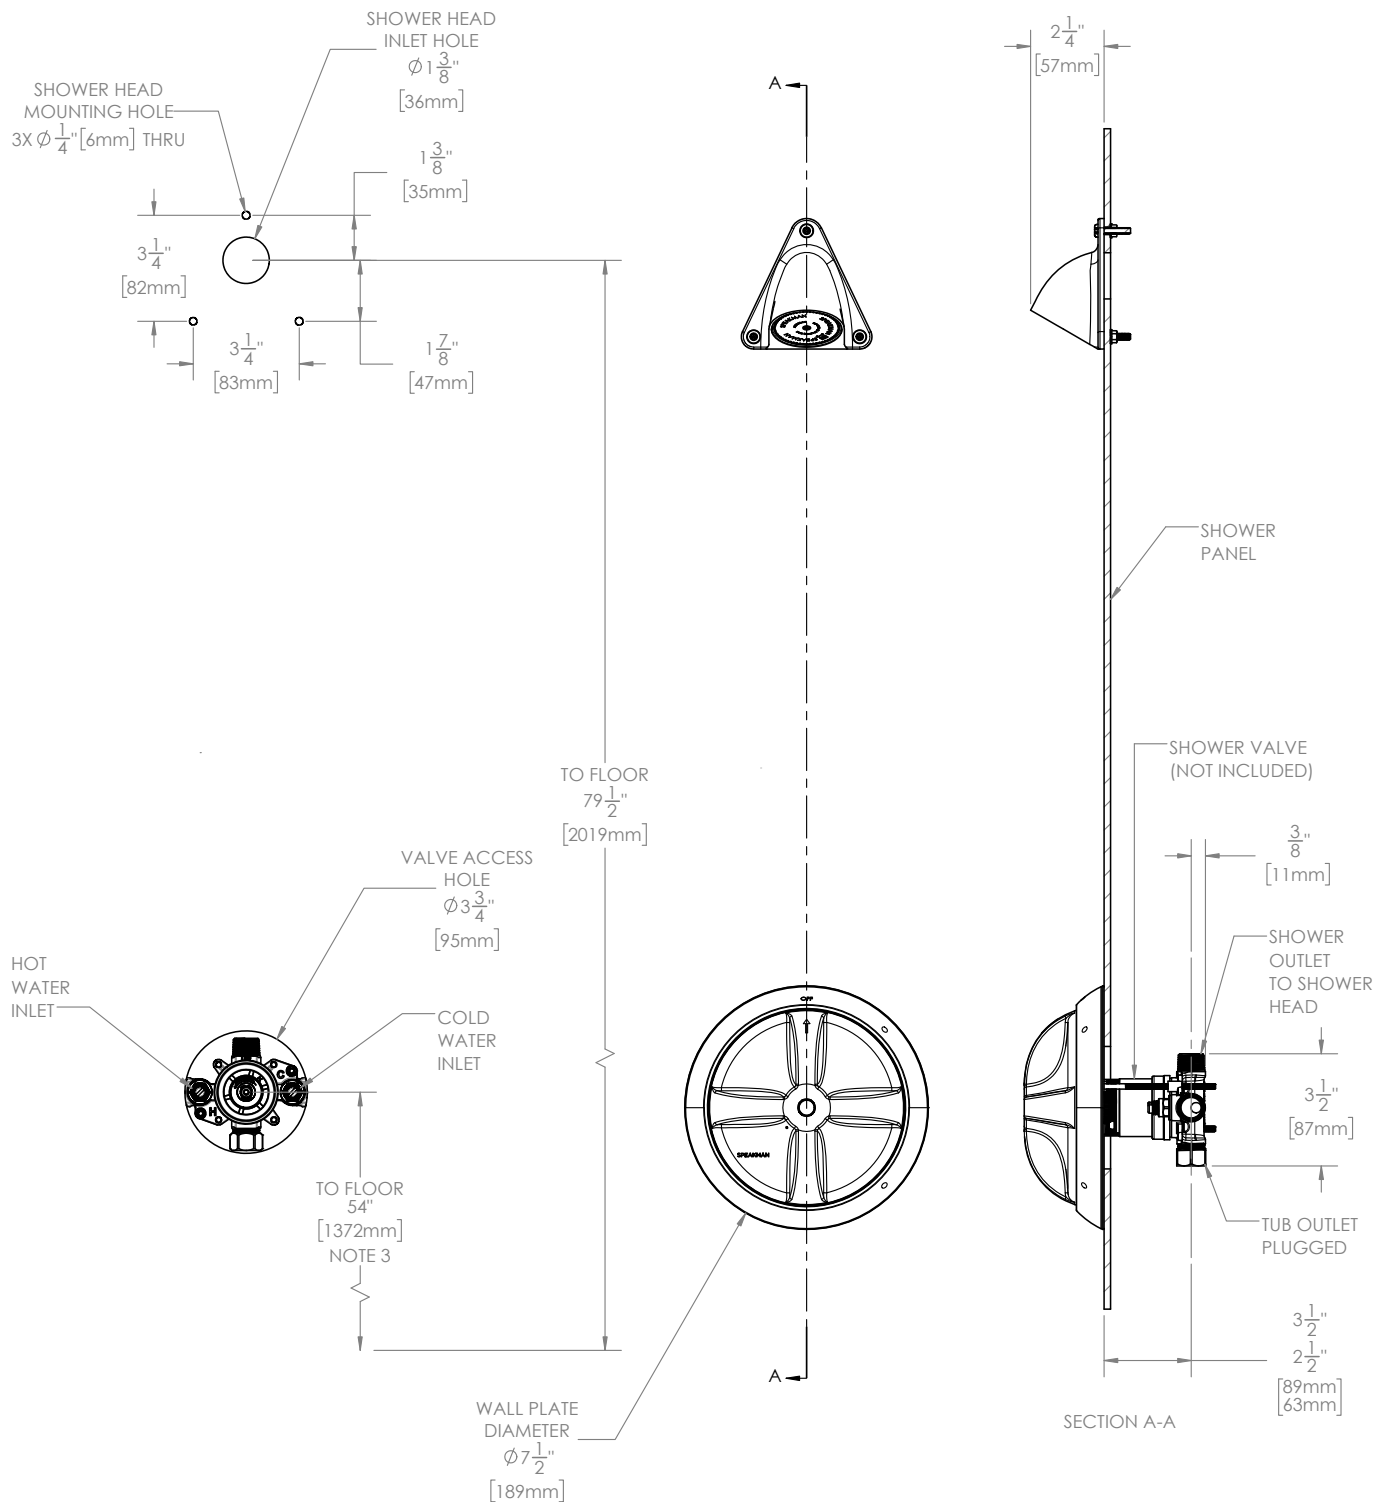

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat and 1/2" male NPT. 3. For ADA mounting locations consult ADAAG, ANSI A117.1 or state regulations.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-SEPTEMBER 2024