SentinelPro™ Diverter Trim, Shower and Tub Combination (Valve not included)

MODELS:

• SLV-5030: 2.0 GPM (7.6 L/min) Flow Rate

Shower Head

• SLV-5030-E15:1.5 GPM (5.7 L/min) Flow Rate

Shower Head

FEATURES:

• CPT-5001: Shower Valve Trim

S-2272-E2: Shower Head 2.0 GPM (7.6 L/min) flow rate
S-2272-E15 Shower Head 1.5 GPM (5.7 L/min) flow rate

S-2500: Shower Arm & FlangeS-1556: Diverter Tub Spout

VALVE OPTIONS:

• CPV-TP2: Thermostatic/Pressure Balancing Valve

Sweat & Thread Connections

STOCK FINISHES:



STANDARDS:

- · ASME A112.18.1/CSA B125.1 Certified
- WaterSense shower head
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

• See Speakman.com For Warranty Information














Information continues on next page

SentinelPro™ Diverter Trim, Shower and Tub Combination (Valve not included)

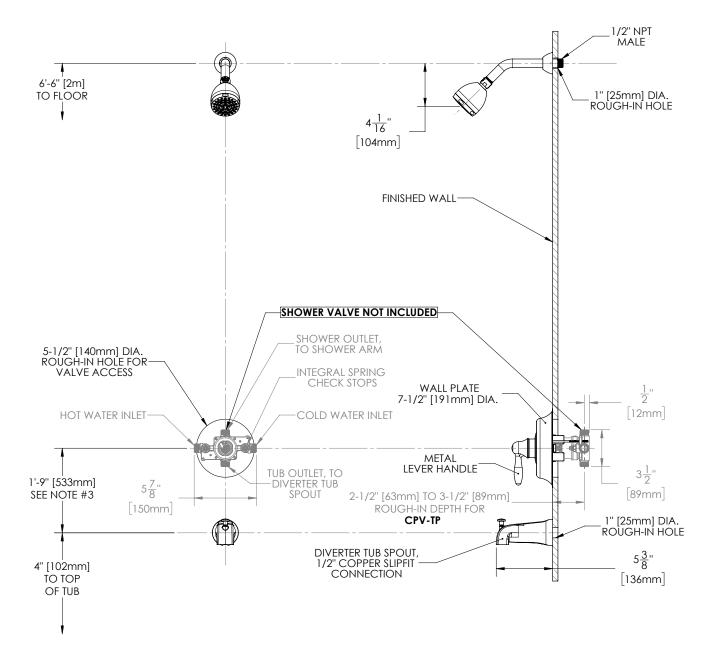

NOTES:

- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
- ALL INLETS AND OUTLETS ARE 1/2" FEMALE COPPER SWEAT AND 1/2" MALE NPT UNLESS OTHERWISE SPECIFIED. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.