

## Neo™ Hand Shower Wand


### MODELS:

- VS-3000: 2.5 GPM (9.5 L/min) flow rate
- VS-3000-E2: 2.0 GPM (7.6 L/min) flow rate
- VS-3000-E175: 1.75 GPM (6.6 L/min) flow rate


### FEATURES:

- 48 rubber spray outlets, 1 spray pattern
- Metal wand construction
- Shower wand has 1/2" -14 NPSM male inlet with check valve
- Bracket not included
- Includes 5' metal hose with (1) 1/2" -14 NPSM female inlet and (1) 1/2"-14 NPSM female outlet with check valve
- Corrosion resistant finishes
- Coordinates with Neo Collection

### STOCK FINISHES:



### SPECIALTY FINISHES:



### OPTIONS/ADD-ONS:

- VS-126: Wall mounted hand held shower bracket



### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- Limited Lifetime Warranty (consumer)
- 1 Year Limited Warranty (commercial)

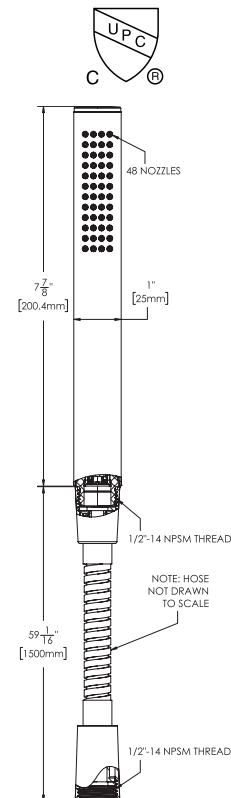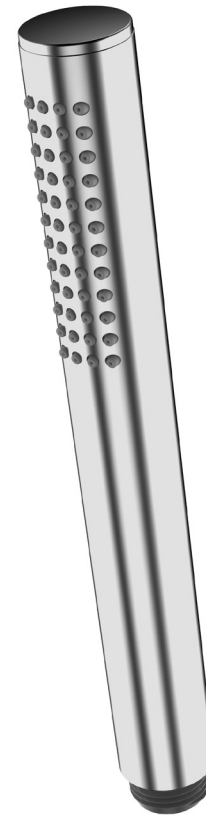

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

\*VS-3000-BBZ (2.5gpm) is non-stock quote only product. VS-3000-BBZ-E2, VS-3000-BBZ-E175 and VS-3000-BBZ-E15 are stock products.

\*\*VS-3000-MB-E15 (1.5gpm) is a non-stock quote only product. VS-3000-MB, VS-3000-MB-E2, and VS-3000-MB-E175 are stock products.

Architect/Engineer Approval Space:

P: 800-537-2107

F: 800-977-2747

W: [WWW.SPEAKMAN.COM](http://WWW.SPEAKMAN.COM)

R: 06-SEPTEMBER 2024