

## Sentinel Mark II® Pressure Balance Valve Shower Combination

### FEATURES:

- Includes Sentinel Mark II® concealed anti-scald balanced pressure valve and hand held spray combination.
- Chrome plated brass wall plate with metal index.
- Chrome plated brass lever handle.
- Independent center sleeve allows up to 1 in. of rough-in variation.
- Adjustable temperature limit stop. Brass valve body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Can be installed back-to-back.
- Roughing-in template included.
- Four port valve with 1/2 in. NPT Male (1/2 in. copper sweat) inlets and outlets.
- Furnished with 1/2 in. pipe cap.
- Chrome plated brass supply ell with wall flange.
- 69 in. square lock stainless steel hose with rubber liner.
- Swivel connector.
- In-line vacuum breaker.
- 30 in. chrome plated brass slide bar with mounting screws.
- VS-100-PC handshower with flow control device reduces flow to 2.5 gpm (9.46 L/min) maximum



### OPTIONS:

- IS: Integral stops
- VH: 69 in. white vinyl hose

### STOCK FINISH:



PC

### STANDARDS:

- ASSE 1016 certified (shower valve)
- ASME 112.18.1/CSA B125.1 certified (shower valve)
- ADA Compliant (Shower valve & trim)

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- See [Speakman.com](http://Speakman.com) for warranty information




Information continues on next page

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. 3. For ADA mounting locations, consult ADAAG, ANSI A117.1, or static regulations

Architect/Engineer Approval Space:

P: 800-537-2107  
F: 800-977-2747  
W: [WWW.SPEAKMAN.COM](http://WWW.SPEAKMAN.COM)  
R: 01-SEPTEMBER 2021

## Sentinel Mark II® Pressure Balance Valve Shower Combination

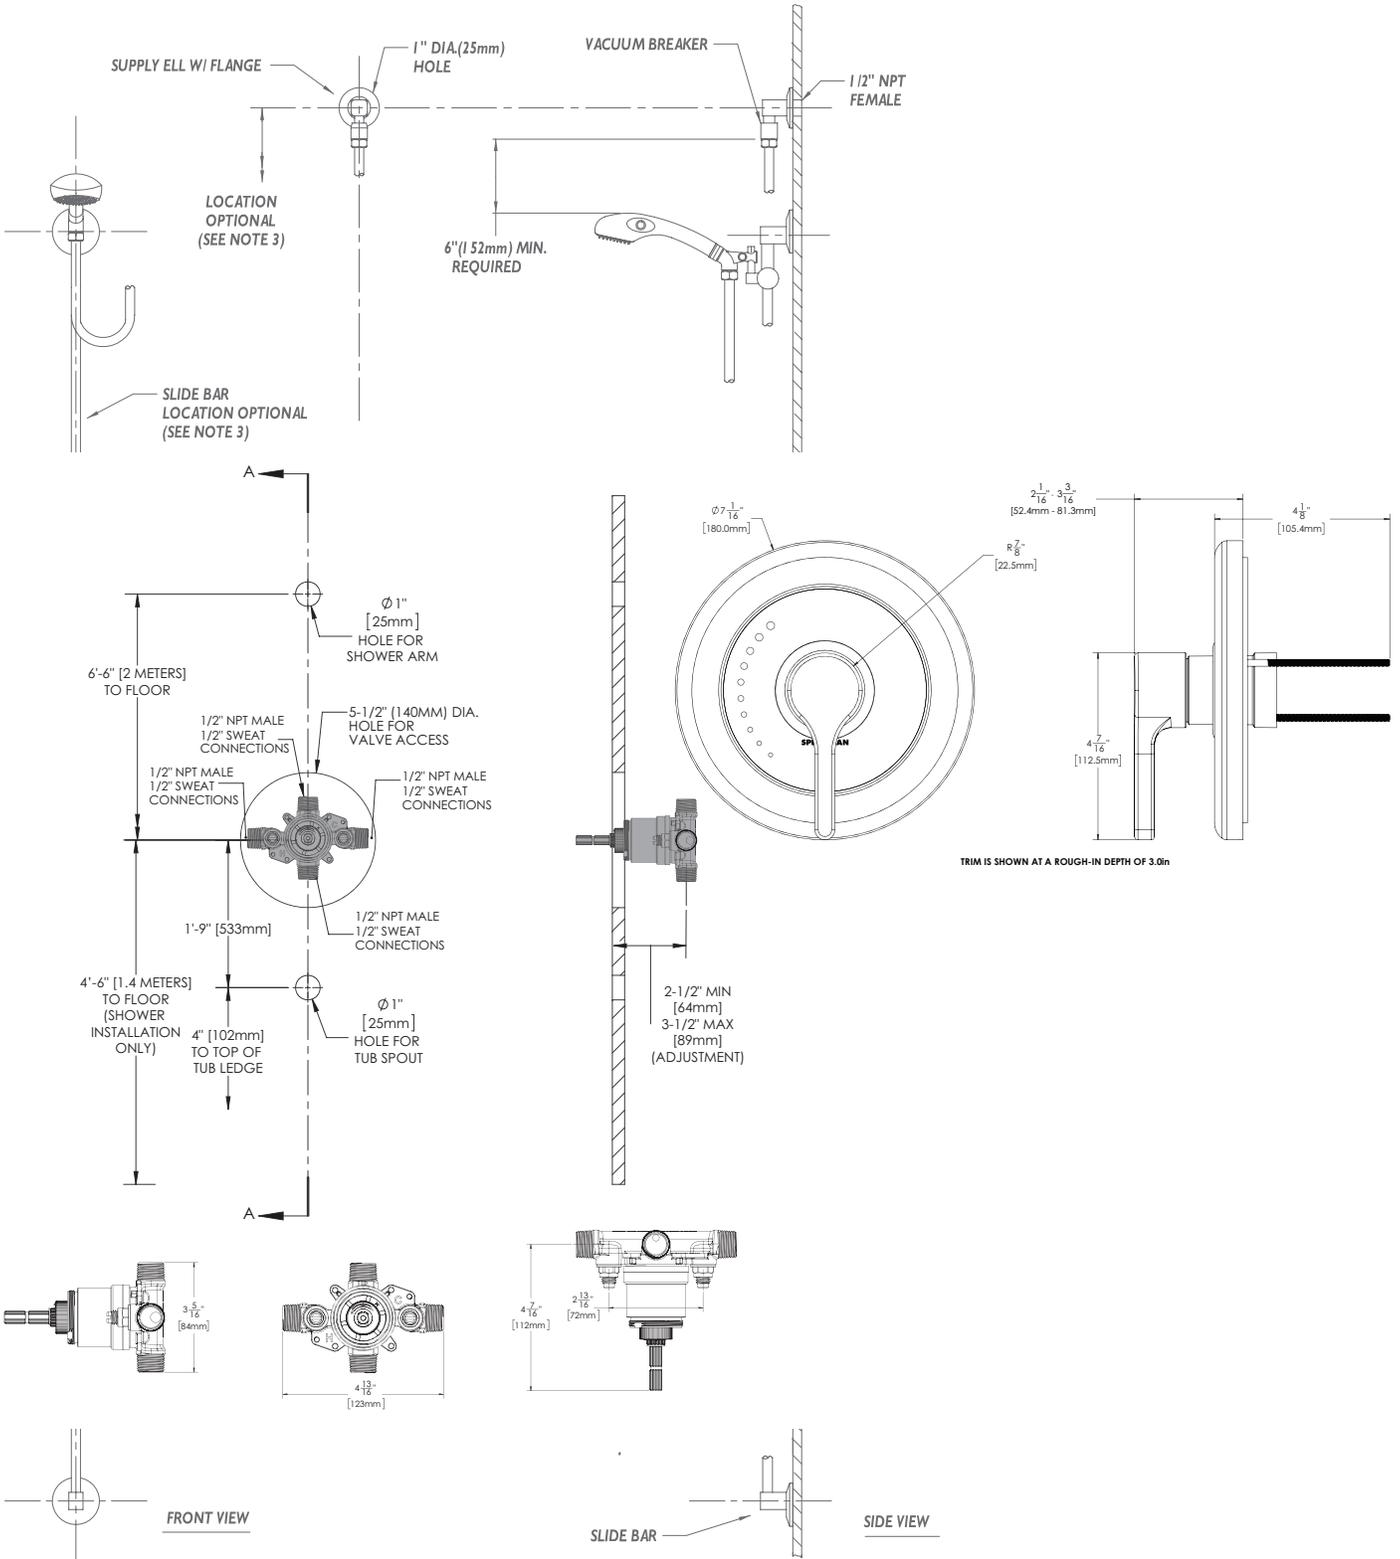

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. 3. For ADA mounting locations, consult ADAAG, ANSI A117.1, or static regulations

Architect/Engineer Approval Space:

P: 800-537-2107  
 F: 800-977-2747  
 W: WWW.SPEAKMAN.COM  
 R: 01-SEPTEMBER 2021